




























SC6000 Series IP Camera Full Price List (Hisilicon Solution)

Sony Sensor	1/1.3/2/3/5 Megapixel	Digital WDR	Super Low-Light	3D Noise Reduction	H.265/H.264 High profile	Lens Correction	Video Rotation	POE Power	ONVIF 2.4	Dual Streaming
-------------	-----------------------	-------------	-----------------	--------------------	--------------------------	-----------------	----------------	-----------	-----------	----------------












Note:
 we could update the price in any time and don't immediately notice you. **Minimum Order Quantity (MOQ) is 50 pieces.** If the single order quantity is less than 50pcs or the order value is less than USD1,000, you need to pay additional charges (\$15-20). Released date: March.2015.







Picture	Model	Specifications	Price	POE	Lens	Infrared	Waterproof	Options
 H.265 5MP Smart	SC6151S-H5	5 Megapixel Real Time H.265 Intelligent Analysis Indoor Box IP Camera, 2592*1920@25fps, Sony Exmor R 1/1.8" CMOS sensor IMX178LQJ, H.265 Encode, MP, BP. Super low light, Digital WDR, Built-in Intelligent Video Analysis function, intelligence 3D noise reduction. Micro SD card(max 64G). Built-in PoE, IR-Cut, Audio, Alarm, RS485, No Lens, No AC/DC adapter.		✓	X	X	X	1. CS Lens 2. IR-Cut: Free 3. Audio, Alarm, Video Output: Free 4. AC/DC Adapter: \$4
 H.265 Smart	SC6121S-H5	2 Megapixel 1080P H.265 Intelligent Analysis Indoor Box IP Camera, 1920*1080@25fps, Sony Exmor R 1/1.8" CMOS sensor IMX178LQJ, H.265 Encode, MP, BP. Super low light, Digital WDR, Built-in Intelligent Video Analysis function, intelligence 3D noise reduction. Micro SD card(max 64G). Built-in PoE, IR-Cut, Audio, Alarm, RS485, No Lens, No AC/DC adapter.		✓	X	X	X	1. CS Lens 2. IR-Cut: Free 3. Audio, Alarm, Video Output: Free 4. AC/DC Adapter: \$4
 H.265 WDR	SC6121-H5-WDR	2 Megapixel 1080P H.265 Super WDR Indoor Box IP Camera. 1920*1080@25fps, 1/2.8" Machine Vision CMOS sensor, H.265 Encode, MP, BP. Multiple Exposure 130dB Super WDR, Super low light, intelligence 3D noise reduction. Micro SD card (max 2TB). Built-in PoE, IR-Cut, Audio, 1000M Gigabit RJ45, Alarm, RS485, No Lens, No AC/DC adapter.		✓	X	X	X	1. CS Lens 2. IR-Cut: Free 3. Audio, Alarm, Video Output: Free 4. AC/DC Adapter: \$4
	SC6810A	1280*720, OV 1/4" CMOS sensor, Digital WDR, intelligence 3D noise reduction, 2 IR lights, 15m. 3.6mm Fixed M12 Lens, Micro SD card. No PoE, 3.6mm Fixed M12 Lens, No AC/DC adapter.		X	3.6mm	10-15m	✓	1. 2.8mm Lens: free 2. AC/DC Adapter: \$6
	SC6811A	1280*720, OV 1/4" CMOS sensor, Digital WDR, intelligence 3D noise reduction, 2 IR lights, 15m. Micro SD card. Built-in PoE, 3.6mm Fixed M12 Lens, No AC/DC adapter.		X	3.6mm	10-15m	✓	1. 2.8mm Lens: free 2. AC/DC Adapter: \$6
	SC6810B	1280*1024, Sony Exmor 1/3" CMOS sensor, super low light, Digital WDR, intelligence 3D noise reduction, 2 IR lights, 15m. No PoE, 3.6mm Fixed M12 Lens, No AC/DC adapter.		X	3.6mm	10-15m	✓	1. 2.8mm Lens: free 2. AC/DC Adapter: \$6
 Hot	SC6811B	1280*1024, Sony Exmor 1/3" CMOS sensor, super low light, Digital WDR, intelligence 3D noise reduction, 2 IR lights, 15m. Micro SD card. Built-in PoE, 3.6mm Fixed M12 Lens, No AC/DC adapter.		✓	3.6mm	10-15m	✓	1. 2.8mm Lens: free 2. AC/DC Adapter: \$6
	SC6820	1920*1080, Sony Exmor 1/2.8" CMOS sensor, super low light, Digital WDR, intelligence 3D noise reduction, 2 IR lights, 15m. Micro SD card. No PoE, 3.6mm Fixed M12 Lens, No AC/DC adapter.		X	3.6mm	10-15m	✓	1. 2.8mm Lens: free 2. AC/DC Adapter: \$6
 Hot	SC6821	1920*1080, Sony Exmor 1/2.8" CMOS sensor, super low light, Digital WDR, intelligence 3D noise reduction, 2 IR lights, 20m. Micro SD card. Built-in PoE, 3.6mm Fixed M12 Lens, No AC/DC adapter.		✓	3.6mm	10-15m	✓	1. 2.8mm Lens: free 2. AC/DC Adapter: \$6
	SC6410A	1280*720, OV 1/4" CMOS sensor, Digital WDR, intelligence 3D noise reduction, 3 IR lights, 30m. Micro SD card. No PoE, 6mm Fixed Lens, No AC/DC adapter.		X	6mm	20-30m	✓	1. 4/8/12mm Lens: free 2. 2.8-12mm Varifocal Lens: \$3 3. AC/DC Adapter: \$6















	SC6411A	1280*720, OV 1/4" CMOS sensor, Digital WDR, intelligence 3D noise reduction, 3 IR lights, 30m. Micro SD card. Built-in PoE, 6mm Fixed Lens, No AC/DC adapter.		✓	6mm	20-30m	✓	1. 4/8/12mm Lens: free 2. 2.8-12mm Varifocal Lens: \$3 3. AC/DC Adapter: \$6
	SC6410B	1280*1024, Sony Exmor 1/3" CMOS sensor, super low light, Digital WDR, intelligence 3D noise reduction, 3 IR lights, 30m. Micro SD card. No PoE, 6mm Fixed Lens, No AC/DC adapter.		X	6mm	20-30m	✓	1. 4/8/12mm Lens: free 2. 2.8-12mm Varifocal Lens: \$3 3. AC/DC Adapter: \$6
 	SC6411B	1280*1024, Sony Exmor 1/3" CMOS sensor, super low light, Digital WDR, intelligence 3D noise reduction, 3 IR lights, 30m. Micro SD card. Built-in PoE, 6mm Fixed Lens, No AC/DC adapter.		✓	6mm	20-30m	✓	1. 4/8/12mm Lens: free 2. 2.8-12mm Varifocal Lens: \$3 3. AC/DC Adapter: \$6
	SC6420	1920*1080, Sony Exmor 1/2.8" CMOS sensor, super low light, Digital WDR, intelligence 3D noise reduction, 3 IR lights, 30m. Micro SD card. No PoE, 6mm Fixed Lens, No AC/DC adapter.		X	6mm	20-30m	✓	1. 4/8/12mm Lens: free 2. 2.8-12mm Varifocal Lens: \$9 3. AC/DC Adapter: \$6
 	SC6421	1920*1080, Sony Exmor 1/2.8" CMOS sensor, super low light, Digital WDR, intelligence 3D noise reduction, 3 IR lights, 30m. Micro SD card. Built-in PoE, 6mm Fixed Lens, No AC/DC adapter.		✓	6mm	20-30m	✓	1. 4/8/12mm Lens: free 2. 2.8-12mm Varifocal Lens: \$9 3. AC/DC Adapter: \$6
 	SC6421Z	1920*1080, Sony Exmor 1/2.8" CMOS sensor, 4x Zoom , super low light, Digital WDR, intelligence 3D noise reduction, 3 IR lights, 30m. Micro SD card. Built-in PoE, 2.8-12mm remote control Optical Zoom and Focus Lens, , No AC/DC adapter.		✓	2.8-12mm Motorized Zoom & Auto Focus	20-30m	✓	1. AC/DC Adapter: \$6
 	SC6431	3.0 Megapixel(2048*1536, 1-22fps), Aptina 1/2.5" CMOS sensor, CPU 900MHZ, H.264 HP, MP, BP, Low light, Digital WDR, intelligence 3D noise reduction, 3 IR led lights, Max 30m, Micro SD card slot, Built-in PoE, 6mm Fixed Lens, No AC/DC adapter.		✓	6mm	20-30m	✓	1. 4/8/12mm Lens: free 2. 3.3-10.5mm Varifocal Lens: \$18 3. AC/DC Adapter: \$6
 	SC6451	5.0 Megapixel(2592*1944, 1-12fps), Aptina 1/2.5" CMOS sensor, CPU 900MHZ, H.264 HP, MP, BP, Low light, Digital WDR, intelligence 3D noise reduction, 3 IR led lights, Max 30m, Micro SD card slot, Built-in PoE, 6mm Fixed Lens, No AC/DC adapter.		✓	6mm	20-30m	✓	1. 4/8/12mm Lens: free 2. 3.3-10.5mm Varifocal Lens: \$20 3. AC/DC Adapter: \$6
	SC6510A	1280*720, OV 1/4" CMOS sensor, , Digital WDR, intelligence 3D noise reduction, 4 IR lights, Max 50m, Micro SD card slot, audio & alarm input/output, RS485. No PoE, 8mm Fixed Lens, No AC/DC adapter.		X	8mm	30-50m	✓	1. 4/6/12mm Lens: free 2. 2.8-12mm Varifocal Lens: \$3 3. AC/DC Adapter: \$6
	SC6511A	1280*720, OV 1/4" CMOS sensor, Digital WDR, intelligence 3D noise reduction, 4 IR lights, Max 50m, Micro SD card slot, audio & alarm input/output, RS485. Built-in PoE, 8mm Fixed Lens, No AC/DC adapter.		✓	8mm	30-50m	✓	1. 4/6/12mm Lens: free 2. 2.8-12mm Varifocal Lens: \$3 3. AC/DC Adapter: \$6
	SC6510	1280*1024, Sony Exmor 1/3" CMOS sensor, super low light, Digital WDR, intelligence 3D noise reduction, 4 IR lights, Max 50m, Micro SD card slot, audio & alarm input/output, RS485. No PoE, 8mm Fixed Lens, No AC/DC adapter.		X	8mm	30-50m	✓	1. 4/6/12mm Lens: free 2. 2.8-12mm Varifocal Lens: \$3 3. AC/DC Adapter: \$6
 	SC6511	1280*1024, Sony Exmor 1/3" CMOS sensor, super low light, Digital WDR, intelligence 3D noise reduction, 4 IR lights, Max 50m, Micro SD card slot, audio & alarm input/output, RS485. Built-in PoE, 8mm Fixed Lens, No AC/DC adapter.		✓	8mm	30-50m	✓	1. 4/6/12mm Lens: free 2. 2.8-12mm Varifocal Lens: \$3 3. AC/DC Adapter: \$6
	SC6520A	1920*1080, Sony Exmor 1/2.8" CMOS sensor, CPU 500MHZ, H.264 HP, MP, BP, super low light, Digital WDR, intelligence 3D noise reduction, 4 IR led lights, Max 50m, Micro SD card slot, audio & alarm input/output, RS485. No PoE, 8mm Fixed Lens, No AC/DC adapter.		X	8mm	30-50m	✓	1. 4/6/12mm Lens: free 2. 2.8-12mm Varifocal Lens: \$9 3. AC/DC Adapter: \$6



 Hot	SC6521A	1920*1080, Sony Exmor 1/2.8" CMOS sensor, CPU 500MHZ, H.264 HP, MP, BP, super low light, Digital WDR, intelligence 3D noise reduction, 4 IR led lights, Max 50m, Micro SD card slot, audio & alarm input/output, RS485. Built-in PoE, 8mm Fixed Lens, No AC/DC adapter.	✓	8mm	30-50m	✓	1. 4/6/12mm Lens: free 2. 2.8-12mm Varifocal Lens: \$9 3. AC/DC Adapter: \$6
	SC6520	1920*1080, Sony Exmor 1/2.8" CMOS sensor, CPU 900MHZ , H.264 HP, MP, BP, super low light, Digital WDR, intelligence 3D noise reduction, 4 IR led lights, Max 50m, Micro SD card slot, audio & alarm input/output, RS485. No PoE, 8mm Fixed Lens, No AC/DC adapter.	X	8mm	30-50m	✓	1. 4/6/12mm Lens: free 2. 2.8-12mm Varifocal Lens: \$9 3. AC/DC Adapter: \$6
 Hot	SC6521	1920*1080, Sony Exmor 1/2.8" CMOS sensor, CPU 900MHZ , H.264 HP, MP, BP, super low light, Digital WDR, intelligence 3D noise reduction, 4 IR led lights, Max 50m, Micro SD card slot, audio & alarm input/output, RS485. Built-in PoE, 8mm Fixed Lens, No AC/DC adapter.	✓	8mm	30-50m	✓	1. 4/6/12mm Lens: free 2. 2.8-12mm Varifocal Lens: \$9 3. AC/DC Adapter: \$6
 Zoom	SC6520AZ	1920*1080, 4X Optical Zoom , Sony Exmor 1/2.8" CMOS sensor, CPU 500MHZ, H.264 HP, MP, BP, super low light, Digital WDR, intelligence 3D noise reduction, 4 IR led lights, Max 50m. No PoE, 2.8-12mm remote control Optical Zoom and Focus Lens, No AC/DC adapter. Economic Type.	✓	2.8-12mm Motorized Zoom & Auto Focus	30-50m	✓	1. AC/DC Adapter: \$6
 Zoom	SC6520Z	1920*1080, 4X Optical Zoom , Sony Exmor 1/2.8" CMOS sensor, CPU 900MHZ, H.264 HP, MP, BP, super low light, Digital WDR, intelligence 3D noise reduction, 4 IR led lights, Max 50m. No PoE, 2.8-12mm remote control Optical Zoom and Focus Lens, No AC/DC adapter. Professional Type.	✓	2.8-12mm Motorized Zoom & Auto Focus	30-50m	✓	1. AC/DC Adapter: \$6
 3MP	SC6531	3.0 Megapixel(2048*1536, 22fps) , Aptina 1/2.5" CMOS sensor, CPU 900MHZ, H.264 HP, MP, BP, Low light, Digital WDR, intelligence 3D noise reduction, 4 IR led lights, Max 50m, Micro SD card slot, audio & alarm input/output, RS485. Built-in PoE, 8mm Fixed Lens, No AC/DC adapter.	✓	8mm	30-50m	✓	1. 4/6/12mm Lens: free 2. 3-10.5mm Varifocal Lens: \$18 3. AC/DC Adapter: \$6
 5MP	SC6551	5.0 Megapixel(2592*1944, 1-12fps) , Aptina 1/2.5" CMOS sensor, CPU 900MHZ, H.264 HP, MP, BP, Low light, Digital WDR, intelligence 3D noise reduction, 4 IR led lights, Max 50m, Micro SD card slot, audio & alarm input/output, RS485. Built-in PoE, 8mm Fixed Lens, No AC/DC adapter.	✓	8mm	30-50m	✓	1. 4/6/12mm Lens: free 2. 2.8-12mm Varifocal Lens: \$20 3. AC/DC Adapter: \$6
	SC6B10B	1280*1024, Sony Exmor 1/3" CMOS sensor, super low light, Digital WDR, intelligence 3D noise reduction, 4 IR lights, Max 50m, Micro SD card slot, No PoE, 8mm Fixed Lens, No AC/DC adapter.	✓	8mm	30-50m	✓	1. 4/6/12mm Lens: free 2. AC/DC Adapter: \$6 3. Don't support varifocal lens
	SC6B11B	1280*1024, Sony Exmor 1/3" CMOS sensor, super low light, Digital WDR, intelligence 3D noise reduction, 4 IR lights, Max 50m, Micro SD card slot, Built-in PoE, 8mm Fixed Lens, No AC/DC adapter.	✓	8mm	30-50m	✓	1. 4/6/12mm Lens: free 2. AC/DC Adapter: \$6 3. Don't support varifocal lens
	SC6B20	1920*1080, Sony Exmor 1/2.8" CMOS sensor, H.264 HP, MP, BP, super low light, Digital WDR, intelligence 3D noise reduction, 4 IR led lights, Max 50m, Micro SD card slot. No PoE, 8mm Fixed Lens, No AC/DC adapter.	X	8mm	30-50m	✓	1. 4/6/12mm Lens: free 2. AC/DC Adapter: \$6 3. Don't support varifocal lens
	SC6B21	1920*1080, Sony Exmor 1/2.8" CMOS sensor, H.264 HP, MP, BP, super low light, Digital WDR, intelligence 3D noise reduction, 4 IR led lights, Max 50m, Micro SD card slot. Built-in PoE, 8mm Fixed Lens, No AC/DC adapter.	✓	8mm	30-50m	✓	1. 4/6/12mm Lens: free 2. AC/DC Adapter: \$6 3. Don't support varifocal lens

	SC6010	1280*1024, Sony Exmor 1/3" CMOS sensor, super low light, Digital WDR, intelligence 3D noise reduction, 2 IR lights, 30m. Micro SD card. No PoE, External adjust 2.8-12mm Varifocal Lens, No AC/DC adapter.		X	2.8-12mm External adjust focus	30m	√	1.AC/DC Adapter: \$6 2. Audio,Alarm,Input/Output: \$6
	SC6011	1280*1024, Sony Exmor 1/3" CMOS sensor, super low light, Digital WDR, intelligence 3D noise reduction, 2 IR lights, 30m. Micro SD card. Built-in PoE, External adjust 2.8-12mm Varifocal Lens, No AC/DC adapter.		√	2.8-12mm External adjust focus	30m	√	1.AC/DC Adapter: \$6 2. Audio Interface Board: \$6
	SC6020	1920*1080, Sony Exmor 1/2.8" CMOS sensor, super low light, Digital WDR, intelligence 3D noise reduction, 2 IR lights, 30m. Micro SD card. No PoE, External adjust 2.8-12mm Varifocal Lens, No AC/DC adapter.		X	2.8-12mm External adjust focus	30m	√	1.AC/DC Adapter: \$6 2. Audio,Alarm,Input/Output: \$6
	SC6021	1920*1080, Sony Exmor 1/2.8" CMOS sensor, super low light, Digital WDR, intelligence 3D noise reduction, 2 IR lights, 30m. Micro SD card. Built-in PoE, External adjust 2.8-12mm Varifocal Lens, No AC/DC adapter.		√	2.8-12mm External adjust focus	30m	√	1.AC/DC Adapter: \$6 2. Audio Interface Board: \$6
	SC6210A	1280*720, OV 1/4" CMOS sensor, Digital WDR, intelligence 3D noise reduction. SD card, audio, alarm. No PoE, No IR Light, No AC/DC Adapter. 4mm Fixed Lens.		X	4mm	X	X	1. 6/8/12mm Lens: free 2. 2.8-12mm Varifocal Lens: \$3 3. AC/DC Adapter: \$6
	SC6211A	1280*720, OV 1/4" CMOS sensor, Digital WDR, intelligence 3D noise reduction. SD card. Built-in PoE, IR Light, No AC/DC Adapter. 4mm Fixed Lens.		√	4mm	√	X	1. 6/8/12mm Lens: free 2. 2.8-12mm Varifocal Lens: \$3 3. AC/DC Adapter: \$6
	SC6210B	1280*1024, Sony Exmor 1/3" CMOS sensor, super low light, Digital WDR, intelligence 3D noise reduction. SD card. IR Light, No PoE, No AC/DC Adapter. 4mm Fixed Lens.		X	4mm	√	X	1. 6/8/12mm Lens: free 2. 2.8-12mm Varifocal Lens: \$3 3. AC/DC Adapter: \$6
 Hot	SC6211B	1280*1024, Sony Exmor 1/3" CMOS sensor, super low light, Digital WDR, intelligence 3D noise reduction. Built-in PoE, IR Light, No AC/DC Adapter. 2.8-12mm Varifocal Lens.		√	2.8-12mm	√	X	1. AC/DC Adapter: \$6
	SC6220A	1920*1080, Sony Exmor 1/2.8" CMOS sensor, CPU 500MHZ, H.264 MP, BP. super low light, Digital WDR, intelligence 3D noise reduction. SD card, IR Light, No PoE, No AC/DC Adapter. 2.8-12mm Varifocal Lens.		X	4mm	√	X	1. 6/8/12mm Lens: free 2. 2.8-12mm Varifocal Lens: \$9 3. AC/DC Adapter: \$6
 Hot	SC6221A	1920*1080, Sony Exmor 1/2.8" CMOS sensor, CPU 500MHZ, H.264 MP, BP. super low light, Digital WDR, intelligence 3D noise reduction. SD card, Built-in PoE, IR Light, No AC/DC Adapter. 2.8-12mm Varifocal Lens.		√	2.8-12mm	√	X	1. AC/DC Adapter: \$6
	SC6220B	1920*1080, Sony Exmor 1/2.8" CMOS sensor, CPU 900MHZ, H.264 HP, MP, BP. super low light, Digital WDR, intelligence 3D noise reduction. SD card, IR Light, No PoE, No AC/DC Adapter. 4mm Fixed Lens.		X	4mm	√	X	1. 6/8/12mm Lens: free 2. 2.8-12mm Varifocal Lens: \$9 3. AC/DC Adapter: \$6
 Hot	SC6221B	1920*1080, Sony Exmor 1/2.8" CMOS sensor, CPU 900MHZ, H.264 HP, MP, BP. super low light, Digital WDR, intelligence 3D noise reduction. SD card, Built-in PoE, IR Light, No AC/DC Adapter. 2.8-12mm Varifocal Lens.		√	2.8-12mm	√	X	1. AC/DC Adapter: \$6
 Zoom	SC6221B-ZF	1920*1080, 4X Optical Zoom , Sony Exmor 1/2.8" CMOS sensor, CPU 900MHZ, H.264 HP, MP, BP. super low light, Digital WDR, intelligence 3D noise reduction. SD card, Built-in PoE, IR Light, No AC/DC Adapter. 2.8-12mm Motorized Zoom & Auto Focus Lens.		√	2.8-12mm Motorized Zoom & Auto Focus	√	X	1. AC/DC Adapter: \$6
 3MP	SC6231B	3.0 Megapixel (2048*1536, 22fps), Aptina 1/2.5" CMOS sensor, CPU 900MHZ, H.264 HP, MP, BP. super low light, Digital WDR, intelligence 3D noise reduction. SD card, Built-in PoE, IR Light, No AC/DC Adapter. 3-10.5mm Varifocal Lens.		√	3-10.5mm	√	X	1. AC/DC Adapter: \$6

	SC6910A	1280*720, OV 1/4" CMOS sensor, Digital WDR, intelligence 3D noise reduction. 2 IR Light, No PoE, No AC/DC Adapter, 3.6mm Fixed Lens. Metal Housing.		X	3.6mm	20-30m	X	1. 2.8/3.6/6mm Lens: free 2. AC/DC Adapter: \$6 3. Audio, Alarm Input/Output: \$6
	SC6911A	1280*720, OV 1/4" CMOS sensor, Digital WDR, intelligence 3D noise reduction. Built-in PoE, 2 IR Light, No AC/DC Adapter, 3.6mm Fixed Lens. Metal Housing.		√	3.6mm	20-30m	X	1. 2.8/3.6/6mm Lens: free 2. AC/DC Adapter: \$6 3. Audio Interface Board: \$6
	SC6910	1280*1024, Sony Exmor 1/3" CMOS sensor, super low light, Digital WDR, intelligence 3D noise reduction. 2 IR Light, No PoE, No AC/DC Adapter, 3.6mm Fixed Lens. Metal Housing.		X	3.6mm	20-30m	X	1. 2.8/3.6/6mm Lens: free 2. AC/DC Adapter: \$6 3. Audio, Alarm Input/Output: \$6
 Hot	SC6911	1280*1024, Sony Exmor 1/3" CMOS sensor, super low light, Digital WDR, intelligence 3D noise reduction. Built-in PoE, 2 IR Light, No AC/DC Adapter, 3.6mm Fixed Lens. Metal Housing.		√	3.6mm	20-30m	X	1. 2.8/3.6/6mm Lens: free 2. AC/DC Adapter: \$6 3. Audio Interface Board: \$6
	SC6920	1929x1080, Sony Exmor 1/2.8" CMOS sensor, super low light, Digital WDR, intelligence 3D noise reduction. 2 IR Light, No PoE, No AC/DC Adapter, 3.6mm Fixed Lens. Metal Housing.		X	3.6mm	20-30m	X	1. 2.8/3.6/6mm Lens: free 2. AC/DC Adapter: \$6 3. Audio, Alarm Input/Output: \$6
 Hot	SC6921	1920*1080, Sony Exmor 1/2.8" CMOS sensor, super low light, Digital WDR, intelligence 3D noise reduction. Built-in PoE, 2 IR Light, No AC/DC Adapter, 3.6mm Fixed Lens. Metal Housing.		√	3.6mm	20-30m	X	1. 2.8/3.6/6mm Lens: free 2. AC/DC Adapter: \$6 3. Audio Interface Board: \$6
 3MP	SC6931	3.0 Megapixel(2048*1536, 22fps), Aptina 1/2.5" CMOS sensor, CPU 900MHZ, H.264 HP, MP, BP, Low light, Digital WDR, intelligence 3D noise reduction, Built-in PoE, 2 IR Light, No AC/DC Adapter, 3.6mm Fixed Lens. Metal Housing.		√	3.6mm	20-30m	X	1. 3.6/6mm Lens: free 2. AC/DC Adapter: \$6 3. Audio Interface Board: \$6
 5MP	SC6951	5.0 Megapixel(2592*1944, 1-12fps), Aptina 1/2.5" CMOS sensor, CPU 900MHZ, H.264 HP, MP, BP, Low light, Digital WDR, intelligence 3D noise reduction, Built-in PoE, 2 IR Light, No AC/DC Adapter, 3.6mm Fixed Lens. Metal Housing.		√	3.6mm	20-30m	X	1. 3.6/6mm Lens: free 2. AC/DC Adapter: \$6 3. Audio Interface Board: \$6
	SC6310	1280*1024, Sony Exmor 1/3" CMOS sensor, CPU 500MHZ, H.264 MP, BP, super low light, Digital WDR, intelligence 3D noise reduction. SD card Vandal Proof Dome, No IR Light, No PoE, No AC/DC Adapter. 4mm fixed Lens.		X	4mm	X	X	1. 6/8/12mm fixed lens: free 2. 2.8-12mm varifocal lens: \$3 3. IR-light: \$5 4. AC/DC Adapter: \$6
 Hot	SC6311	1280*1024, Sony Exmor 1/3" CMOS sensor, CPU 500MHZ, H.264 MP, BP, super low light, Digital WDR, intelligence 3D noise reduction. SD card, audio, alarm. Vandal Proof Dome, Built-in PoE, IR Light, No AC/DC Adapter. 2.8-12mm Varifocal Lens. Waterproof, Vandal Proof.		√	2.8-12mm	√	√	1. AC/DC Adapter: \$6
	SC6320	1920*1080, Sony Exmor 1/2.8" CMOS sensor, CPU 900MHZ, H.264 HP, MP, BP, super low light, Digital WDR, intelligence 3D noise reduction. SD card Vandal Proof Dome, No IR Light, No PoE, No AC/DC Adapter. 4mm fixed Lens.		X	4mm	X	X	1. 6/8/12mm fixed lens: free 2. 2.8-12mm varifocal lens: \$9 3. IR-light: \$5 4. AC/DC Adapter: \$6
 Hot	SC6321	1920*1080, Sony Exmor 1/2.8" CMOS sensor, CPU 900MHZ, H.264 HP, MP, BP, super low light, Digital WDR, intelligence 3D noise reduction. SD card, audio, alarm. Vandal Proof Dome, Built-in PoE, IR Light, No AC/DC Adapter. 2.8-12mm Varifocal Lens. Waterproof, Vandal Proof.		√	2.8-12mm	√	√	1. AC/DC Adapter: \$6
 Zoom	SC6321A-ZF	1920*1080, 4X Optical Zoom , Sony Exmor 1/2.8" CMOS sensor, CPU 500MHZ, H.264 HP, MP, BP, super low light, Digital WDR, intelligence 3D noise reduction. SD card, audio, alarm. Vandal Proof Dome, Built-in PoE, IR Light, No AC/DC Adapter. 2.8-12mm Motorized Zoom & Auto Focus. Waterproof, Vandal Proof.		√	2.8-12mm Motorized Zoom & Auto Focus	√	√	1. AC/DC Adapter: \$6

	SC6321-ZF	1920*1080, 4X Optical Zoom , Sony Exmor 1/2.8" CMOS sensor, CPU 900MHZ, H.264 HP, MP, BP.super low light, Digital WDR, intelligence 3D noise reduction.SD card, audio, alarm. Vandal Proof Dome, Built-in PoE, IR Light, No AC/DC Adapter.2.8-12mm Motorized Zoom & Auto Focus Lens. Waterproof, Vandal Proof.	✓	2.8-12mm Motorized Zoom & Auto Focus	✓	✓	1. AC/DC Adapter: \$6
	SC6331	3.0 Megapixel(2048*1536, 22fps), Aptina 1/2.5" CMOS sensor, CPU 900MHZ, H.264 HP, MP, BP.super low light, Digital WDR, intelligence 3D noise reduction.SD card, audio, alarm. Vandal Proof Dome, Built-in PoE, IR Light, No AC/DC Adapter.3-10.5mm Varifocal Lens. Waterproof, Vandal Proof.	✓	3-10.5mm	✓	✓	1. AC/DC Adapter: \$6
	SC6710A	1280*720, OV 1/4" CMOS sensor, Digital WDR, intelligence 3D noise reduction, SD card. Mini Vandal Proof Dome, No PoE, No AC/DC Adapter. 3.6mm Fixed Lens.	X	3.6mm	X	✓	1. 2.8mm Lens: free 2. AC/DC Adapter: \$4
	SC6711A	1280*720, OV 1/4" CMOS sensor, Digital WDR, intelligence 3D noise reduction, SD card. Mini Vandal Proof Dome, Built-in PoE, Fixed 3.6mm M12 Lens, No AC/DC adapter.	✓	3.6mm	X	✓	1. 2.8mm M12 Lens: free 2. AC/DC Adapter: \$4
	SC6710B	1280*1024, Sony Exmor 1/3" CMOS sensor, super low light, Digital WDR, intelligence 3D noise reduction, SD card. Mini Vandal Proof Dome, No PoE, No AC/DC Adapter. 3.6mm Fixed Lens.	X	3.6mm	X	✓	1. 2.8mm M12 Lens: free 2. AC/DC Adapter: \$4
	SC6711B	1280*1024, Sony Exmor 1/3" CMOS sensor, super low light, Digital WDR, intelligence 3D noise reduction, SD card. Mini Vandal Proof Dome, Built-in PoE, Fixed 3.6mm M12 Lens, No AC/DC adapter.	✓	3.6mm	X	✓	1. 2.8mm M12 Lens: free 2. AC/DC Adapter: \$4
	SC6720	1920*1080, Sony Exmor 1/2.8" CMOS sensor, super low light, Digital WDR, intelligence 3D noise reduction, SD card. Mini Vandal Proof Dome, No PoE, Fixed 3.6mm M12 Lens, No AC/DC adapter.	X	3.6mm	X	✓	1. 2.8mm M12 Lens: free 2. AC/DC Adapter: \$4
	SC6721	1920*1080, Sony Exmor 1/2.8" CMOS sensor, super low light, Digital WDR, intelligence 3D noise reduction, SD card. Mini Vandal Proof Dome, Built-in PoE, Fixed 2.8mm M12 Lens, No AC/DC adapter.	✓	3.6mm	X	✓	1. 2.8mm M12 Lens: free 2. AC/DC Adapter: \$4
	SC6711A-IR	1280*720, OV 1/4" CMOS sensor ,super low light, Digital WDR, intelligence 3D noise reduction, SD card. Mini Vandal Proof Dome, Built-in PoE, Built in IR .Fixed 3.6mm M12 Lens, No AC/DC adapter	✓	3.6mm	X	✓	1. 2.8mm M12 Lens: free 2. AC/DC Adapter: \$4 3. Audio: \$4 4. Audio & Alarm: \$7
	SC6711B-IR	1280*1024, Sony Exmor 1/3" CMOS sensor, super low light, Digital WDR, intelligence 3D noise reduction, SD card. Mini Vandal Proof Dome, Built-in PoE, Built in IR Fixed 3.6mm M12 Lens, No AC/DC	X	3.6mm	X	✓	1. 2.8mm M12 Lens: free 2. AC/DC Adapter: \$4 3. Audio: \$4 4. Audio & Alarm: \$7
	SC6721-IR	1920*1080, Sony Exmor 1/2.8" CMOS sensor, super low light, Digital WDR, intelligence 3D noise reduction, SD card. Mini Vandal Proof Dome, Built-in PoE, Built -in IR .Fixed 2.8mm M12 Lens, No AC/DC adapter	✓	3.6mm	X	✓	1. 2.8mm M12 Lens: free 2. AC/DC Adapter: \$4 3. Audio: \$4 4. Audio & Alarm: \$7
	SC6110A	1280*720, OV 1/4" CMOS sensor, Digital WDR, intelligence 3D noise reduction.Micro SD card. No PoE, No Lens, No AC/DC adapter.	X	X	X	X	1. CS Lens 2. AC/DC Adapter: \$4
	SC6111A	1280*720, OV 1/4" CMOS sensor, Digital WDR, intelligence 3D noise reduction. Micro SD card. Built-in PoE, No Lens, No AC/DC adapter.	✓	X	X	X	1. CS Lens 2. AC/DC Adapter: \$4
	SC6110B	1280*1024, Sony Exmor 1/3" CMOS sensor, super low light, Digital WDR, intelligence 3D noise reduction.Micro SD card. No PoE, No Lens, No AC/DC adapter.	X	X	X	X	1. CS Lens 2. IR-Cut: \$4 3. Audio,Alarm,Video Output: \$6 4. AC/DC Adapter: \$4


 Hot	SC6111B	1280*1024, Sony Exmor 1/3" CMOS sensor, super low light, Digital WDR, intelligence 3D noise reduction.Micro SD card. Built-in PoE, No Lens, No AC/DC adapter.		✓	X	X	X	1. CS Lens 2. IR-Cut: \$4 3. Audio,Alarm,Video Output: \$6 4. AC/DC Adapter: \$4
	SC6120A	1920*1080, Sony Exmor 1/2.8" CMOS sensor, CPU 500MHZ, H.264 MP, BP. Super low light, Digital WDR, intelligence 3D noise reduction.Micro SD card. No PoE, No Lens, No AC/DC adapter.		X	X	X	X	1. CS Lens 2. IR-Cut: \$4 3. Audio,Alarm,Video Output: \$6 4. AC/DC Adapter: \$4
	SC6121A	1920*1080, Sony Exmor 1/2.8" CMOS sensor, CPU 500MHZ, H.264 MP, BP. Super low light, Digital WDR, intelligence 3D noise reduction.Micro SD card. Built-in PoE, No Lens, No AC/DC adapter.		✓	X	X	X	1. CS Lens 2. IR-Cut: \$4 3. Audio,Alarm,Video Output: \$6 4. AC/DC Adapter: \$4
	SC6120B	1920*1080, Sony Exmor 1/2.8" CMOS sensor, CPU 900MHZ, H.264 HP, MP, BP.super low light, Digital WDR, intelligence 3D noise reduction.Micro SD card. No PoE, No Lens, No AC/DC adapter.		X	X	X	X	1. CS Lens 2. IR-Cut: \$4 3. Audio,Alarm,Video Output: \$6 4. AC/DC Adapter: \$4
 Hot	SC6121B	1920*1080, Sony Exmor 1/2.8" CMOS sensor, CPU 900MHZ, H.264 HP, MP, BP.super low light, Digital WDR, intelligence 3D noise reduction.Micro SD card. Built-in PoE, No Lens, No AC/DC adapter.		✓	X	X	X	1. CS Lens 2. IR-Cut: \$4 3. Audio,Alarm,Video Output: \$6 4. AC/DC Adapter: \$4
 3MP	SC6131B	3.0 Megapixel(2048*1536, 22fps) super high definition, Aptina/2.5" CMOS sensor, H.264 HP, MP, BP.Low light, Digital WDR, intelligence 3D noise reduction.Micro SD card. Built-in PoE, No Lens, No AC/DC adapter.		✓	X	X	X	1. CS Lens 2. IR-Cut: \$4 3. Audio,Alarm,Video Output: \$6 4. AC/DC Adapter: \$4
 5MP	SC6151B	5.0 Megapixel(2592*1944, 1-12fps) super high definition, Aptina/2.5" CMOS sensor, H.264 HP, MP, BP.Low light, Digital WDR, intelligence 3D noise reduction.Micro SD card. Built-in PoE, No Lens, No AC/DC adapter.		✓	X	X	X	1. CS Lens 2. IR-Cut: \$4 3. Audio,Alarm,Video Output: \$6 4. AC/DC Adapter: \$4
	SC6610B-C20	1280*720, Made In China camera module, CMOS, 20X optical Zoom , Wiper, waterproof cable box metal housing		X	3.5mm(W) ~70mm (T) 20x Optical Zoom	X	✓	4. AC/DC Adapter: \$4
 Hot	SC6610B-S20	1280*720, SONY FCB3300 camera module, CMOS, 20X optical Zoom , Wiper, waterproof cable box metal housing		X	3.5mm(W) ~70mm (T) 20x Optical Zoom	X	✓	
	SC6610B-H18	1280*720, Hitachi SC110N camera module, CCD, 18X optical Zoom, Wiper, waterproof cable box metal housing		X	4.7mm(W) ~84.6mm (T) 18x Optical Zoom	X	✓	
	SC6620B-S20	1920*1080, SONY FCB6300 camera module, CMOS, 20X Optical Zoom, Wiper, waterproof cable box metal housing		X	4.7mm(W) ~94mm (T) 20x Optical Zoom	X	✓	
	SC6610-C20	1280*720, Made In China camera module, CMOS, 20X optical Zoom , Wiper, IR distance 180m, waterproof cable box metal housing		X	3.5mm(W) ~70mm (T) 20x Optical Zoom	180m	✓	
 Hot	SC6610-S20	1280*720, SONY FCB3300 camera module, CMOS, 20X optical Zoom , Wiper, IR distance 180m, waterproof cable box metal housing		X	3.5mm(W) ~70mm (T) 20x Optical Zoom	180m	✓	
	SC6610-H18	1280*720, Hitachi SC110N camera module, CCD, 18X optical Zoom, Wiper,IR distance 180m, waterproof cable box metal housing		X	4.7mm(W) ~84.6mm (T) 18x Optical Zoom	180m	✓	

	SC6620-S20	1920*1080, SONY FCB6300 camera module, CMOS, 20X Optical Zoom, Wiper,IR distance 180m, waterproof cable box metal housing		X	4.7mm(W) ~94mm (T) 20x Optical Zoom	180m	√	
	SC6620-S30	1920*1080, SONY FCB-EH6500 camera module, CMOS, 30X Optical Zoom, Wiper,IR distance 180m, waterproof cable box metal housing		X	4.6mm(W) ~138.0mm (T) 30x Optical Zoom	180m	√	

Sysvideo VS Hikvision & Dahua
(1.3MP CMOS Box IP Camera at night)

2013-07-11 22:02:38


Sysvideo's 720P IP Camera

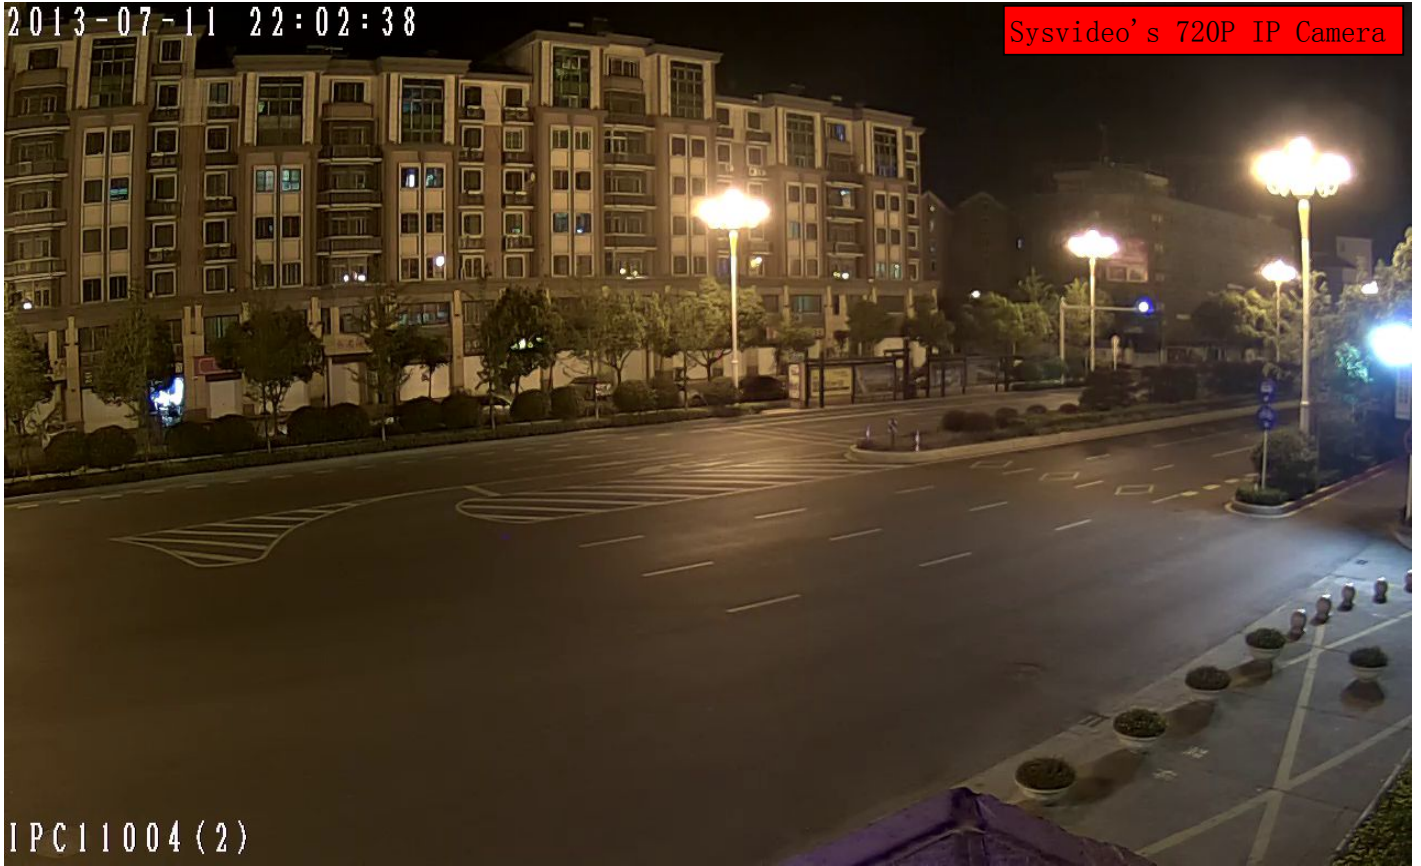

IPC11004(2)


2013-06


Hikvision's 720P IP Camera

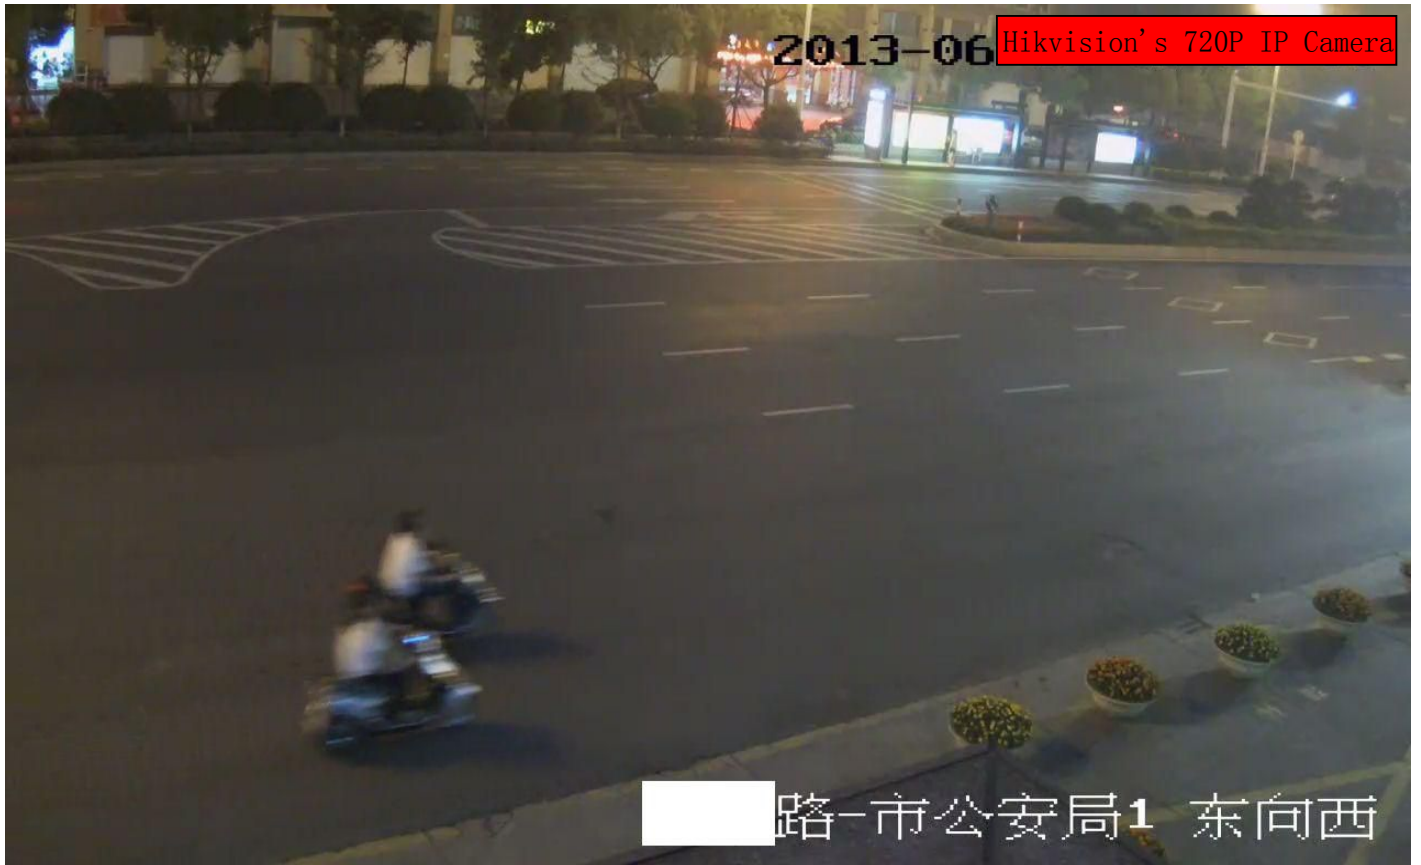

路-市公安局1 东向西

Dahua's 720P IP Camera



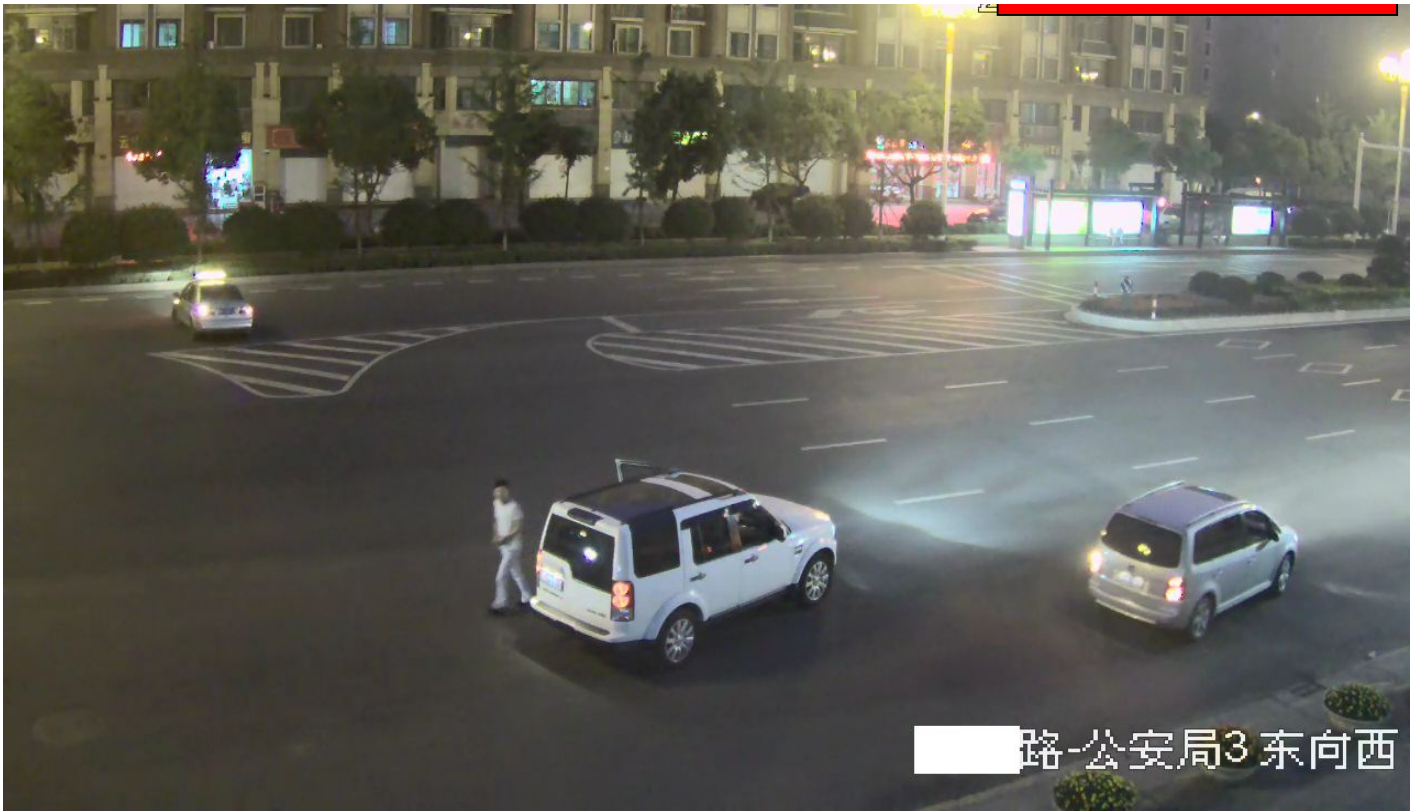

路-公安局3 东向西